



Planar Venue Pro Series

LED Video Wall Displays

- ▶ *1.9, 2.5, 3.9, 5.9mm pixel pitches*
- ▶ *Front or rear service & installation*
- ▶ *Single-person handling*
- ▶ *Hang, stack, or wall mount*




Planar® Venue™ Pro Series indoor LED video wall displays are designed to meet the needs of temporary event applications, large venues and fixed installations. They offer full front or rear service access to electronics for deployment versatility, and magnetically-attachable cabinets with a quick-lock system to support single-person handling.

Easy Access

Front-side installation and service shrink the overall video wall footprint and servicing space needed behind the wall making it simpler to fit in more spaces than other LED video wall solutions. Installation and service are also possible from the rear, when needed.



Product Highlights

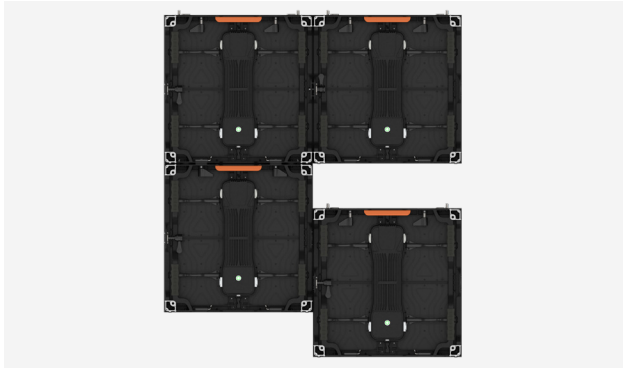

Solo Set-up

Magnetic points briefly hold the LED cabinet in place while a lone installer can secure it and finalize cabling. Handles, locking pins and an embedded quick-lock system also make it easy and efficient to secure cabinets together.

Compact Components

All electronics are contained in single, compact compartment on the back of the cabinet that is accessible from the front. The compartment is easily removable to quickly access and service all components, and facilitate wall mounting.

Specifications

Model	VPI-1.9	VPI-2.5	VPI-3.9	VPI-5.9
Pixel Pitch (mm)	1.9	2.5	3.9	5.9
Cabinet Size (W x H x D)	19.69"x19.69"x2.7" (500x500x74mm)		19.69"x19.69"x3.03" (500x500x77mm)	
Cabinet Diagonal	27.83" (707.10mm)			
Cabinet Area (m²)	0.25			
Cabinet Resolution	256x256	200x200	128x128	84x84
Pixel Density (per m²)	262,144	160,000	65,536	28,244
Modules/Cabinet (W x H)	2x2			
Module Size (W x H)	250x250mm			
Power Consumption, Maximum (watts)	160			
Line Voltage	100~240v AC, 50/60Hz			
Cabinet Weight (per display)	≤ 17.764lbs			
Cabinet Weight (per m²)	≤ 70.55lbs			
Brightness Max, Calibration On (cd/sq)	1,000			
Supported Frame Rate	50Hz/60Hz			
Color Temperature (K)	3,000-10,000 adjustable			
Contrast	6,000:1			
Viewing Angle (50% of brightness)	>150° horizontal; >130° vertical			
Mounting Orientation	Wall mount, faceted, hanging, stacking			
Installation/Service	Front or Rear			
Refresh Rate	3,840Hz			
LED Lifetime (50% brightness)	100,000hrs			
Operating Temp/ Humidity (degrees F/C)	-20° to 40° C -22° to 102° F (10-80% RH, non-condensing)			
Storage Temp/ Humidity (degrees F/C)	-40° to 60° C -40° to 140° F (10-85% RH, non-condensing)			
IP Rating	30			

For more information, click to visit: www.planar.com/venue-pro

Planar is a trademark of Planar Systems, Inc. All other trademarks and service marks are property of their holders. Copyright © 2022 Planar Systems, Inc. All rights reserved. This document may not be copied in any form without permission from Planar. Information in this document is subject to change without notice. 3/2022